


Brochure

Compac 4 drive unit B-1016-GB

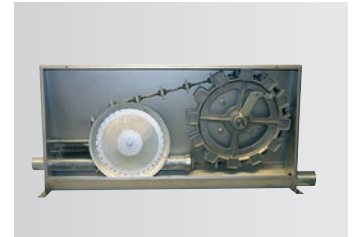

Compac 4 drive unit

- The Compac 4 drive unit with Ø60 mm PowerLine chain is ideal for the transport of both pellets and meal.
- The drive unit is equipped with a large aluminium drive wheel that ensures stable and steady operation with minimal wear and tear on the plastic discs. The drive wheel can also be inverted, giving it a double lifetime.
- The drive unit is equipped with a slanting, self-emptying base, which means that the amount of animal feed accumulating in the machine is very limited.
- The cabinet is made of stainless steel in a compact design that enables optimum fitting to a wall or directly onto the floor. To allow easy access for servicing, the drive unit is available with optional chain direction.
- The machine is supplied as standard with a chain break switch that safeguards against slack or broken chains, as well as a locking plate to prevent chain overloading. The drive unit can also be supplied with a shaft speed monitor, which - in combination with ACO Funki's various controls - provides extra system safety.
- The accompanying sight glass ensures that the filling ratio of the feed in the system can be optimally regulated.

Danish Design
German Quality
Global Experience



Technical data

Article No.	Drive direction	Motor size	Voltage	Hz	Motor speed	Chain speed	Capacity
		kW	V	Hz	RPM	M/min	Kg/hour
0211-424	V > H	1,5	230/400	50	1410	21	900
0211-426	H > V	1,5	230/400	50	1410	21	900

The capacity is calculated on the basis of a 60% filling ratio and a specific gravity of 650 kg/m³

Dimensions

